

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number  
**WO 2005/061798 A1**

(51) International Patent Classification<sup>7</sup>: **D21H 23/56**,  
B05C 1/08, 11/02, D21H-25/12

JYSKÄ (FI). KUPARINEN, Sami [FI/FI]; Lehtorannantie  
5 A 10, FI-40520 JYVÄSKYLÄ (FI). LINTULA, Timo  
[FI/FI]; Lintusyrjäntie 64, FI-42700 KEURUU (FI).

(21) International Application Number:  
PCT/FI2004/050189

(74) Agent: **KESPAT OY**; P.O. Box 601, FI-40101  
JYVÄSKYLÄ (FI).

(22) International Filing Date:  
16 December 2004 (16.12.2004)

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20035248 22 December 2003 (22.12.2003) FI

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,


(71) Applicant (*for all designated States except US*): **METSO  
PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FI-00130  
HELSINKI (FI).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KAUTTO**,  
Ari-Pekka [FI/FI]; Kirrinkydöntie 10 A 19, FI-40420

[Continued on next page]

(54) Title: ROD CRADLE FOR A FILM, COATING OR SEALING ROD

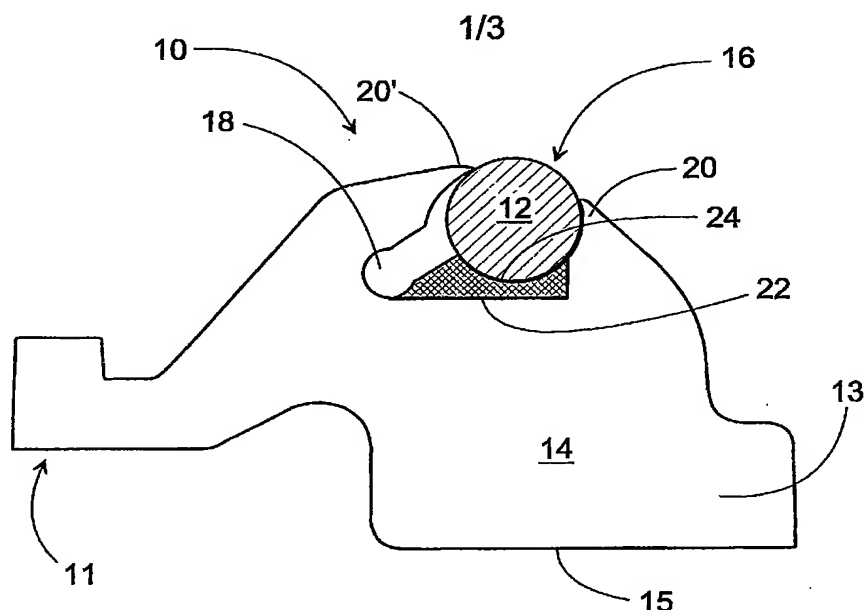

(57) Abstract: The invention relates to a cradle for a film, coating, or sealing rod, in which the rod cradle has a profile (10) that includes a base part (11), a rod groove (16), and a body part (14) between them. The rod groove (16) is arranged to receive the rod (12) between lips (20, 20') edging the rod groove (16). The circumference lying against the rod (12) is formed at least partly of a slider piece (22), which is an insert-moulded part of the profile (10), and which is of a material other than the material of the base part (11) and the body part (14).



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

**ROD CRADLE FOR A FILM, COATING, OR SEALING ROD**

The present invention relates to a cradle for a film, coating, or sealing rod, in which the rod cradle has a profile that includes a base part, a rod groove, and a body part between them, and in which the rod groove is arranged to receive the rod between lips edging the rod groove, and in which the circumference lying against the rod is formed at least partly of a slider piece of a material other than the material of the base part and the body part. Rod cradles are used in surface-sizing and coating devices. Usually the profile includes at least one liquid groove formed on the bottom of the rod groove.

Usually, the rod cradle is machined, moulded, or extruded from a single material. A compromise must then be made between the material requirements.

Finnish patent 111477 (W000/63494) discloses a coating device for a paper machine, in which the coating cradle is in two parts. The two-part construction permits the rod groove to be made from a material better suited to the operation of the rod, when a flexible material of sufficient strength is used in the body and base parts. However, the solution disclosed is a complex totality. As such, the problems referred to in the patent are still relevant. The wear resistance of the rod cradle will not be satisfactory, if the material must be selected as a compromise with the requirements of the base and body parts. If the rod is installed in a very hard cradle, both the rod and the cradle are in danger of breaking.

30

In general, widely differing technical demands are placed on the rod cradle, such as

- \* good wear resistance
- \* easy installation of the rod
- 35 \* good slip properties when dry and when lubricated with water, paste, or size

- \* good non-dirtying/release properties
- \* attenuation of vibration
- \* good chemical resistance in the prevailing environmental conditions

5

Application publications DE 10045515 and WO 03/078077 disclose the creation of a separate rod-groove component. A rod bed consisting of a slot-like piece, which has, in addition to the rod groove, a water groove for water lubrication, is manufactured from a material with better wear resistance. The body part has a recess of corresponding size for this rod bed, to which the rod bed is locked mechanically. Such a solution is obviously expensive to manufacture, because the rod bed must be made in a completely separate work stage while the recess it requires is machined in its own work stage.

Wear resistance can be improved by surfacing, as is disclosed in PCT publication WO 00/58555. However, the thickness of the surfacing remains so small as to make the result unsatisfactory.

The present invention is intended to create a simpler rod-cradle construction than previously, in which the problems referred to are solved and the desired properties are achieved at least satisfactorily. The characteristic features of the invention are stated in the accompanying Claims. According to the invention, a hard wear-resistant slider piece is insert moulded in the profile of the rod cradle, and is bounded on the bottom of the rod groove by part of the circumference lying against the rod. In a second embodiment, the insertion casting includes the entire rod groove, together with the liquid channel. In a third embodiment, the slider piece is formed with the aid of the non-homogeneity of the profile. On the bottom of the rod groove, the compound at the location forming the sliding surface is densified or rarefied, thus increasing the local hardness and wear resistance.

Other embodiments and advantages of the invention are described in connection with the later examples of applications. The slider piece is generally harder than the body of the cradle, which is usually made from polyurethane. The slider piece is not made by extrusion from polyurethane, instead it can be of sintered thermoplastic or thermoset plastic, or moulded from hard polyurethane by insert moulding.

In the following, the invention is examined with the aid of examples, which are shown in the accompanying figures:

Figure 1 shows a rod cradle equipped with an insertion-moulded slider piece,

Figure 2 shows a rod cradle equipped with a sliding surface based on non-homogeneity,

Figure 3a shows a rod cradle equipped with an insertion-moulded slider piece and lip pieces,

Figure 3b shows an adaption of the rod cradle of Figure 3a,

Figure 4 shows an adaptation of the rod cradle of Figure 1,

Figure 5 shows a rod cradle equipped with an insertion-moulded rod-groove part.

The slider cradles of Figures 1 - 5 are intended for known types of coating machines, which are used in paper and board machines. In all of the figures, the same reference numbers are used for components that are functionally similar. Thus, the reference number 10 shows the actual cradle profile while its main components are a base part 11, a body part 14, a loading surface 15, a rod groove 16, its lips 20 and 20', and a liquid groove 18.

There is a widening 13 in the cradle profile of Figure 1, in order to widen the loading surface 15 for two loading hoses.

In terms of the present invention, the essential feature is the slider piece 22, formed on the bottom of the road groove 16, the sliding surface 24 of which forms only a part of the sliding surface lying against the rod in the rod groove. The  
5 slider piece 22 is formed optimally in the area in which wear is otherwise greatest. The lips 20 and 20' can be formed from a flexible base material, so that there is no need to compromise in the seal. In this case, a coating rod 12 is set in the rod groove.

10

In Figure 2, there is a variation of the rod cradle of Figure 1. The slider piece of the profile is formed with the aid of non-homogeneity in such a way that, at the location of the slider piece of Figure 1, there is a harder and more wear-  
15 resistant area forming through the selection of the compound material.

The manufacture of the rod cradle of Figure 1 takes place as two consecutive mouldings, in such a way that the rod cradle is  
20 moulded in an up-and-down position relative to Figure 1, so that in the first stage the slider piece 22 is moulded on the bottom of the mould with the aid of an additional mould, after which the additional mould is removed, so that some other part of the profile of the rod cradle can be moulded. The mouldings  
25 are joined permanently to each other.

The cradle profile of Figure 2 can be moulded, for example, in such a way that the lower part of the rod cradle is moulded in an inverted state relative to the figure, by filling the mould  
30 half-way, after which a bead is laid at a selected point using a polymer compound that spreads to a limit extent in semi-rigid moulding, in a manner based on specific gravity, a chemical reaction, mixing, or some other spreading mechanism. The desired non-homogeneity of the profile and the desired hardness  
35 on the bottom of the rod groove can be achieved using the correct polymer and compound selection.

Figure 3a shows an adaptation of the rod cradle of Figure 1. In this model, there is no additional flange component, but there is a second water groove 18'. In this model, there are particularly lips 20 and 20' which are insertion-moulded parts and which bound the rod groove 16. In this way, the wearing sliding surface and the sealing sliding surfaces can be formed optimally, independently of the properties of the base part and the body.

10 Figure 3b shows a further adaptation of the cradle of Figure 3a. The ridge between the liquid grooves 18, 18' is mixed, in order to optimize the properties of the sliding surface. In this case, the lips 20, 20' are of the base material.

15 Figure 4 shows an adaptation of the cradle profile of Figure 1. In this case, the slider piece 22 is quite small, normally covering the cradle part that wears most in the rod groove 16.

Figure 5 shows an embodiment that differs completely from that described above, including a attached part 22, which includes both the rod groove 16 and the liquid groove 18 in their entirety. Though in this solution the whole sliding surface is of the same material, the solution nevertheless provides an opportunity to optimize the wearing surface, compared to the material of the base part 16 and the body part 14.

#### Advantages of the invention

By manufacturing the cradle from two or more materials, the good properties of each material can be exploited.

- The body of the cradle can be easily manufactured from mass-produced polyurethane, which is elastic and thus permits easy installation of the rod while also allows good sealing of the liquid groove. Polyurethane is environmentally durable and attenuates vibration.

- The main sliding surface of the cradle can be manufac-

tured from a low-friction material, such as UHMW-PE, HDPE, or fluoro-plastic.

- The lips of the cradle can be manufactured alternatively from polyurethane with a good sealing property, or from low-friction hard polyurethane, by insert moulding.



**Claims**

1. A cradle for a film, coating, or sealing rod, in which the rod cradle has a profile (10) that includes a base part (11),  
5 a rod groove (16), and a body part (14) between them, and in which the rod groove (16) is arranged to receive the rod (12) between lips (20, 20') edging the rod groove (16), and in which the circumference lying against the rod (12) is formed at least partly of a slider piece (22) of a material other than the  
10 material of the base part (11) and the body part (14), characterized in that the slider piece (22) is an insert-moulded part of the profile (10).

2. A rod cradle according to Claim 1, characterized in that the  
15 said insert-moulded slider piece (22) forms a limited part (24) of the circumference lying against the rod (12), both of the lips (20, 20') of the rod groove (16) being of the base material.

20 3. A rod cradle according to Claim 1, characterized in that the said insert-moulded slider piece (22) forms a rod groove (16) and a liquid groove (18) surrounding the entire rod (12).

4. A rod cradle according to Claim 1 or 2, characterized in  
25 that the slider piece is formed of a polymer slider piece (8).



5. A rod cradle according to Claim 2, characterized in that the slider piece consists of an elastomer slider piece (4), which is moulded from polyurethane.



30

6. A rod cradle according to any of Claims 1 - 5, characterized in that the slider piece (22) is of polyurethane, which is filled with a substance that reduces friction.



35 7. A rod cradle according to Claim 1, characterized in that the slider piece is non-homogenous, in such a way that the material

on the bottom of the rod groove has a lower coefficient of friction against the rod than the rest of the circumference.

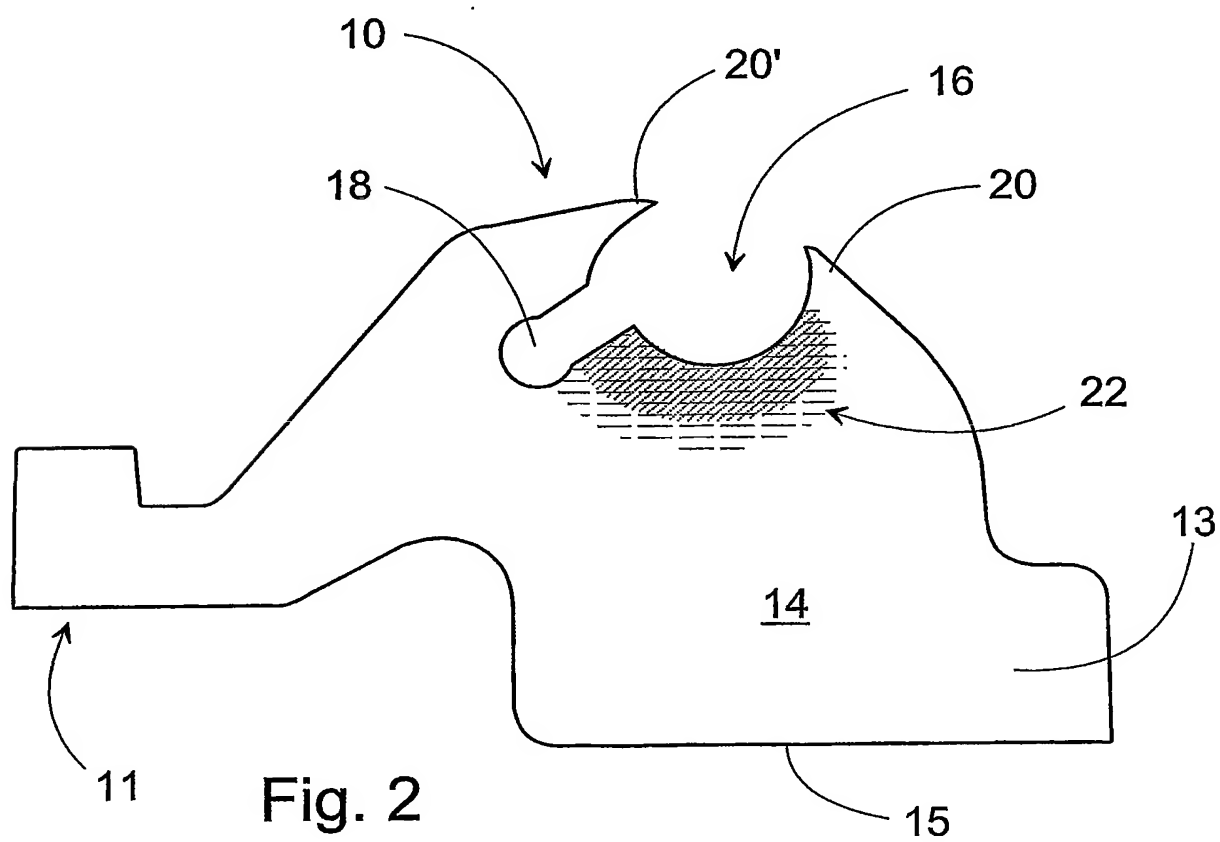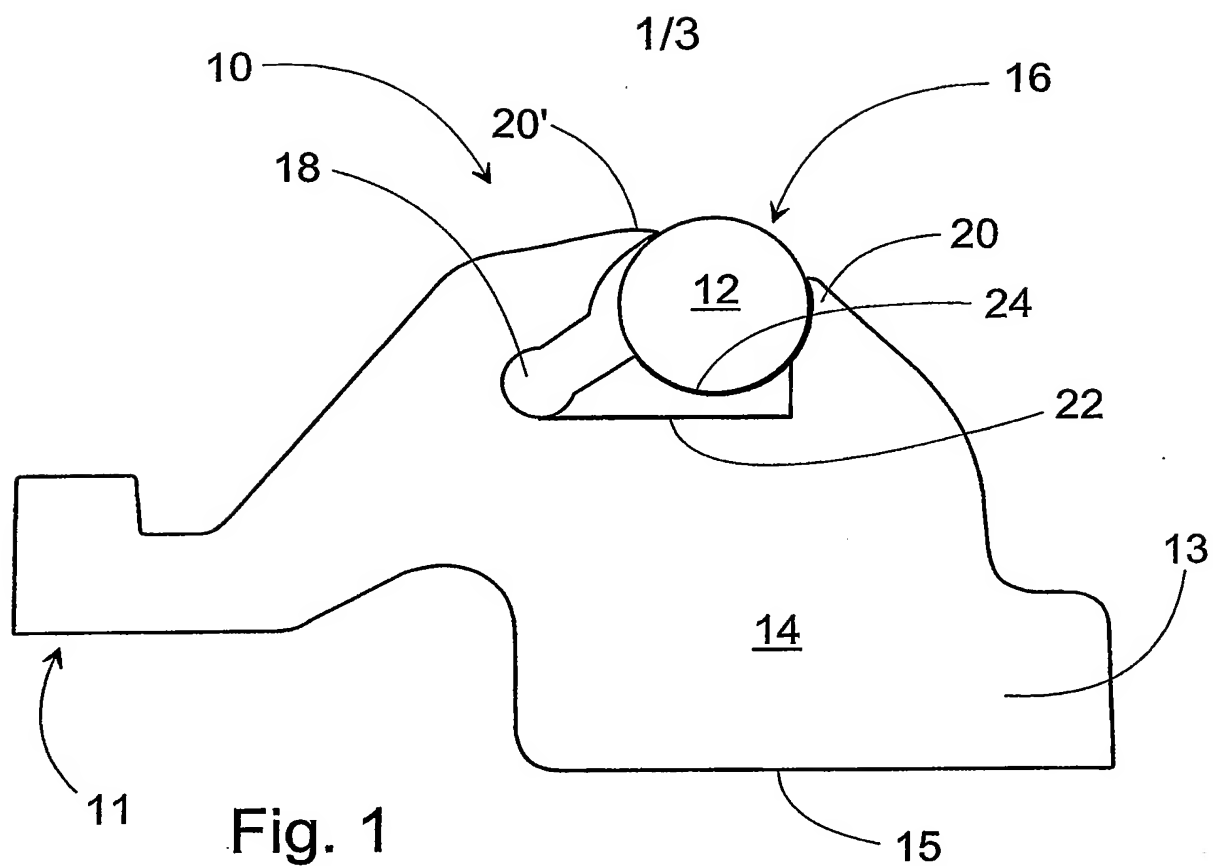

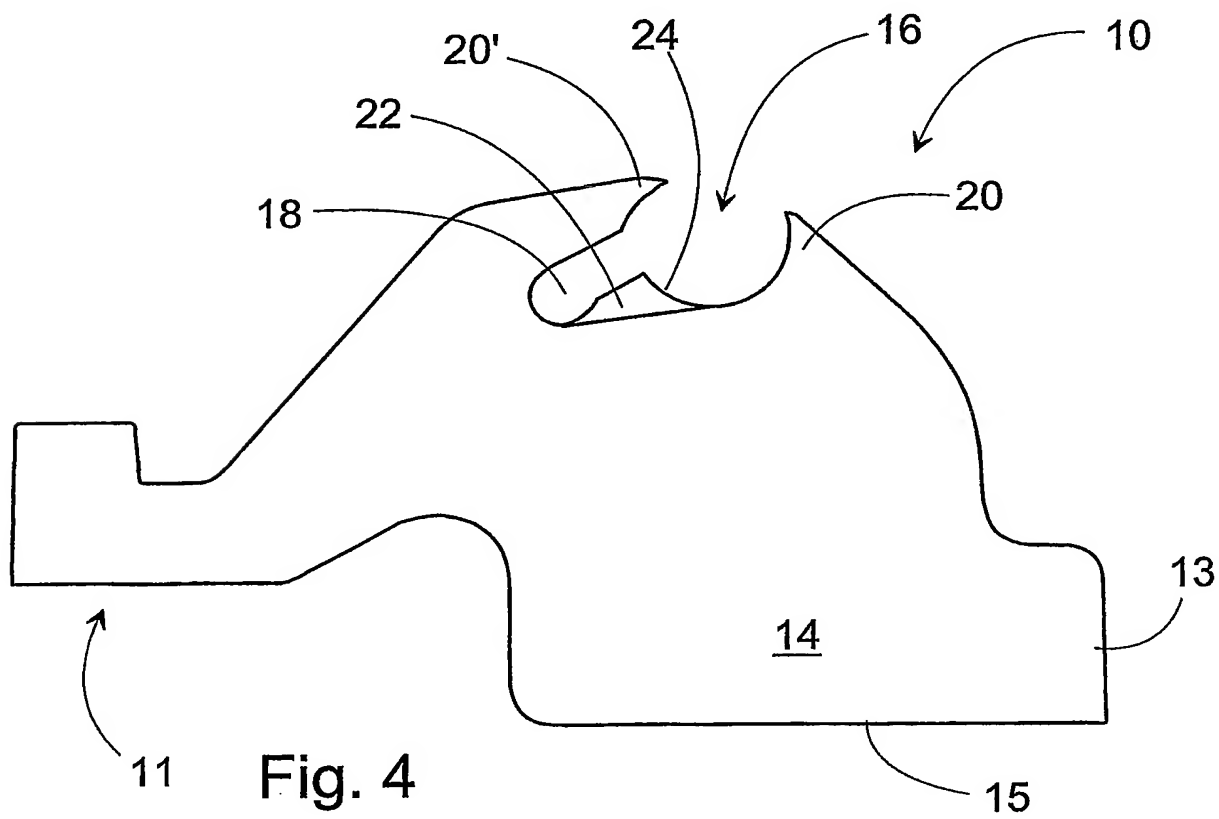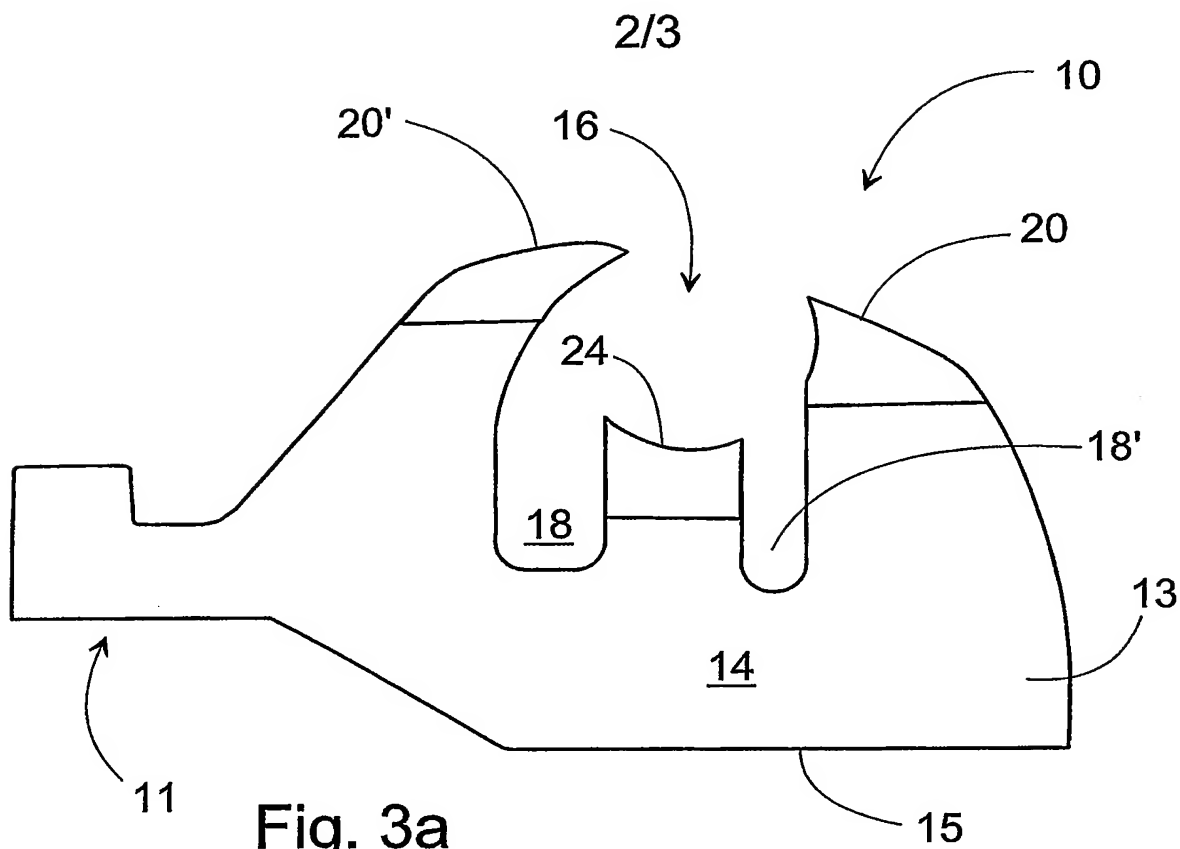

3/3

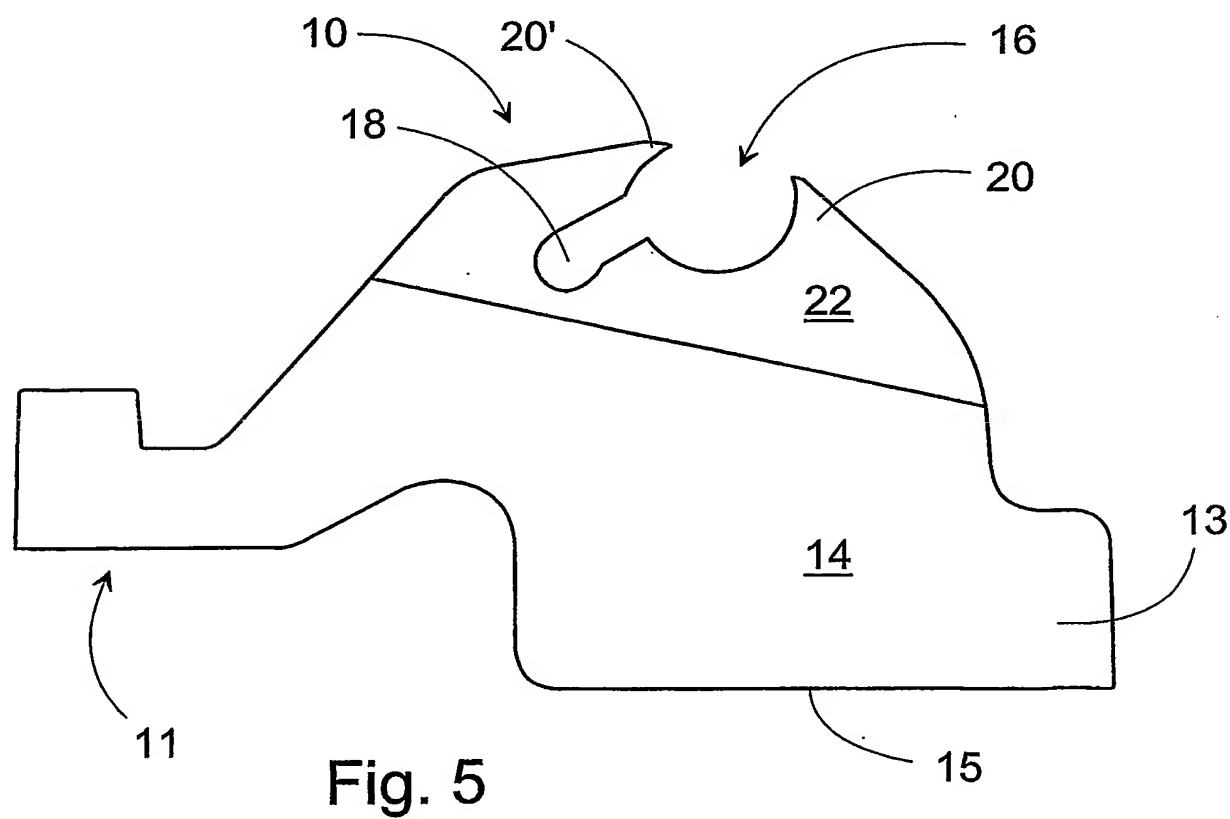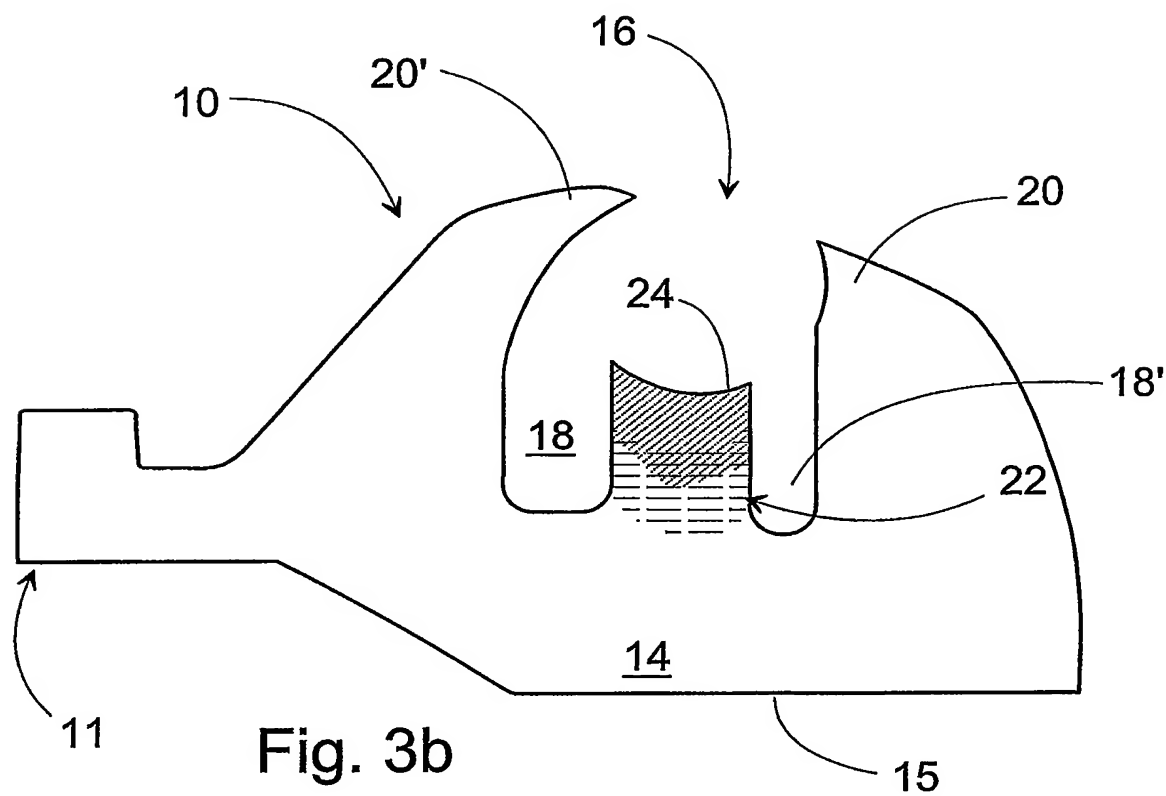

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2004/050189

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21H 23/56, B05C 1/08, B05C 11/02, D21H 25/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21H, B05C, B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0058555 A1 (VALMET CORPORATION), 5 October 2000 (05.10.2000), page 4, line 16 - page 5, line 2; page 6, line 1 - line 9 --	1-7
A	WO 03078077 A1 (HORST SPRENGER GMBH), 25 Sept 2003 (25.09.2003), page 6, line 1 - line 14 --	1-7
A	WO 0063494 A1 (VALMET CORPORATION), 26 October 2000 (26.10.2000), page 4, line 24 - page 5, line 2; page 6, line 25 - page 7, line 5, figure 3A, abstract ---	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 April 2005

Date of mailing of the international search report

21-04-2005

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Lars Hennix/Eö

Telephone No. +46 8 782 25 00

PCT/FI 2004/050189

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
-----------	--	-----------------------

1-7

**more info**

1-7

2014 2014

**海軍部海軍官校**

# INTERNATIONAL SEARCH REPORT

Information on patent family members

01/04/2005

International application No.

PCT/FI 2004/050189

WO	0058555	A1	05/10/2000	AU	3561300	A	16/10/2000
				DE	10084391	T	03/07/2003
				FI	106139	B	00/00/0000
				FI	990684	A	27/09/2000
				SE	0103195	A	27/11/2001
<hr/>							
WO	03078077	A1	25/09/2003	AU	2003223848	A	00/00/0000
				DE	10390987	D	00/00/0000
				EP	1485209	A	15/12/2004
				US	20050039676	A	24/02/2005
<hr/>							
WO	0063494	A1	26/10/2000	AU	3969300	A	02/11/2000
				FI	111477	B	00/00/0000
				FI	990885	A	21/10/2000
<hr/>							
US	5599392	A	04/02/1997	BR	9609749	A	30/03/1999
				CA	2227501	A,C	06/02/1997
				DE	840825	T	12/11/1998
				DE	69603969	D,T	09/03/2000
				EP	0840825	A,B	13/05/1998
				SE	0840825	T3	
				FI	108803	B	00/00/0000
				FI	980064	A	14/01/1998
				JP	10511039	T	27/10/1998
				WO	9704172	A	06/02/1997
<hr/>							
US	6019846	A	01/02/2000	NONE			